


# Technical Data Sheet

## Aluminium Anodised Hit & Miss Grille

### Product

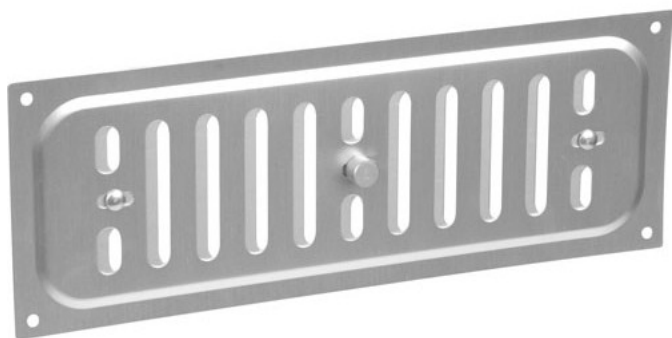

### Use

- To cover the inner opening on the cavity sleeve and provide an aesthetically acceptable appearance, while maintaining a free air flow.

### INSTALLATION

- Internal grilles should be positioned over the internal opening of the cavity sleeve and fixed to the wall using screws and wall plugs
- Never block or restrict the flow of air through these ventilators
- Do not use hit & miss grilles when ventilating a gas or heat producing appliance
- We recommend using our external cowls to help reduce draughts caused by wind blast

### FEATURES & BENEFITS

- Adjustable background ventilators for rooms
- Manufactured in high quality pressed aluminium
- Aesthetically pleasing in aluminium anodised finish
- Flush face and low profile vent
- Suitable for new build or Retro-fit
- Not suitable for boilers, stoves ad fires.
- Easy installation
- Mechanically fixed
- Durable and resistant to decay
- Independently tested

### Product Details

#### 9x3 Hit & Miss vent

Size	242(L) x 89mm (H)
Ventilation Eq Area	2800m <sup>2</sup>
Colour	Anodised aluminium
Code	IHM93A

#### 9x6 Hit & Miss vent

Size	242(L) x 165mm (H)
Ventilation EQ Area	6356mm <sup>2</sup>
Colour	Anodised Aluminium
Code	IHM96A

#### 9x9 Hit & Miss vent

Size	242(L) x 242mm (H)
Ventilation EQ Area	9000mm <sup>2</sup>
Colour	Anodised Aluminium
Code	IHM99A

