



Angled brad nails

16 gauge angled brad nails for all second fix applications

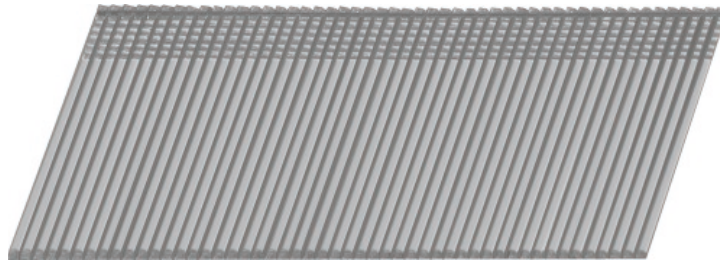

Product information

Features and benefits

- Smooth nail shank for low penetration resistance
- Chisel point to prevent timber from splitting
- T type head provides a concealed fixing
- The glue laminated collation ensures a lack of residue in the tool and on the work surface
- Available in galvanised or stainless steel for higher corrosion protection
- Compatible with all leading manufactures 16ga tools

Applications


- Installation of wooden facades and other external trim applications
- Installation of soffits and other roof finishing elements
- Installation of timber decorative elements on facades and other timber structures

Base materials

- Timber
- Plywood
- Chipboard
- Wood

Corresponding products

- R-RAWL-A2064 Gas powered second fix nailer

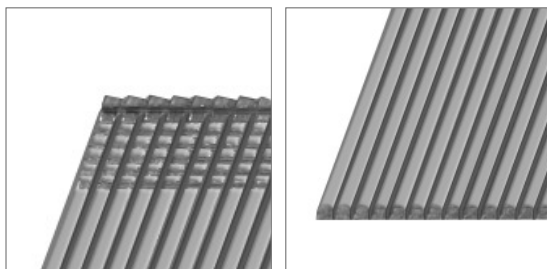

Product commercial data

| Index | Gauge | Length | Finish | Collation | Fasteners per strip | Carton quantity | Fuel cells per carton | Box weight | Outer weight | EAN |
|-------------|----------|--------|-----------------|--------------------|---------------------|-----------------|-----------------------|------------|--------------|---------------|
| | | [mm] | | | [pcs] | [pcs] | [pcs] | kg | kg | |
| BRADS2032 | 16 Gauge | 32 | Galvanised | 20° glue laminated | 50 | 2000 | 2 | 1.18 | 1.18 | 5010445004667 |
| BRADS2038 | 16 Gauge | 38 | Galvanised | 20° glue laminated | 50 | 2000 | 2 | 0.94 | 0.94 | 5010445004674 |
| BRADS2050 | 16 Gauge | 50 | Galvanised | 20° glue laminated | 50 | 2000 | 2 | 1.72 | 1.72 | 5010445004698 |
| BRADS2050SS | 16 Gauge | 50 | Stainless Steel | 20° glue laminated | 50 | 2000 | 2 | 1.76 | 1.76 | 5010445004728 |
| BRADS2064 | 16 Gauge | 64 | Galvanised | 20° glue laminated | 50 | 2000 | 2 | 1.00 | 1.00 | 5010445004704 |
| BRADS2045 | 16 Gauge | 45 | Galvanised | 20° glue laminated | 50 | 2000 | 2 | 1.45 | 1.45 | 5010445004681 |