



Paving Jointing Mortar

Convenient and easy to use jointing mortar.

Requires just 1 litre of clean water per 6 kg sachet added to the tub and mixed with a paddle mixer, to be ready to go.

Ease of use makes tufftop Utility ideal for smaller projects including driveways, pavements and patios.

tufftop Utility has been developed to make things as easy as possible for all users. Supplied in a reusable and recyclable tub. The tub is manufactured from 50% Post Consumer Re grind (PCR) & 50% Post Industrial Re grind (PIR).


The individual sachets in each tub ensure the correct amount of tufftop Utility is used and wastage is minimised.

The carefully measured contents of each sachet are mixed with exactly 1 litre of water.

Paving unit size	Joint width	m ² per (12kg) tub
600 x 1200 x 20 mm	4 mm	27 m ²
600 x 900 x 20 mm	4 mm	24 m ²
600 x 600 x 20 mm	4 mm	20 m ²
600 x 900 x 20 mm	6 mm	16 m ²
600 x 900 x 24 mm	8 mm	10 m ²
600 x 900 x 24 mm	10 mm	8 m ²
600 x 600 x 24 mm	10 mm	7 m ²
600 x 900 x 50 mm	10 mm	4 m ²
600 x 600 x 50 mm	10 mm	3 m ²

Technical Specs

Colour	Beige, Natural Grey, Mid Grey & Dark Grey
Packaging	12 kg Tub (2x 6 kg Sachets)
Joint width	>4 mm
Typical water used	1 litre per 6 kg sachet
Typical coverage	www.steintec.co.uk/ calculator/
Packages per pallet	48
Pallet quantity	600 kg inc. pallet
Set time	24 hours
Working time	30 min at 20 °C
Working temperature	≥ 3 °C
Compressive strength (20 °C)	7 days: ~20 N/mm ²
	28 days: ~25 N/mm ²
Flexural strength	~3.5 N/mm ²
Elastic modulus	(20,000 ± 4,000) N/ mm ²
Adhesive bond	~1.5 N/mm ²
Storage life	2 years from manufacture date
Compliance	BS 7533-101:2021

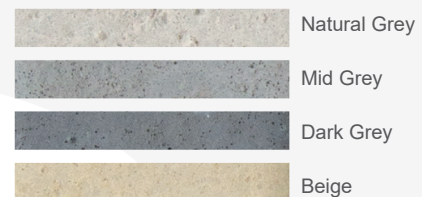

N.B. colours are indicative only



Steintec[®]
high performance paving mortars

1 Northwick Rd
Canvey Island
Essex
SS8 0PU
+44 203 598 9800
www.steintec.co.uk